

INTERNATIONAL MARITIME ORGANIZATION

4 ALBERT EMBANKMENT
LONDON SE1 7SR

Telephone: 071-735 7611
Telegrams: INTERMAR-LONDON SE1
Telex: 23588
Telefax: 071-587 3210



MSC/Circ.664
22 December 1994

Ref. T3/2.04

CONTAINERS AND CARGOES

**CODE OF SAFE PRACTICE FOR CARGO STOWAGE AND
SECURING (CSS CODE)**

Amendments to the CSS Code

- 1 The Maritime Safety Committee, at its sixty-fourth session (5 to 9 December 1994), adopted, in accordance with operative paragraph 3 of Assembly resolution A.714(17), the annexed amendments to the Code of Safe Practice for Cargo Stowage and Securing (CSS Code).
- 2 Member Governments are invited to bring the said amendments to the attention of shipowners, ship operators, shipmasters and crews and all others concerned.

ANNEX

**AMENDMENTS TO THE CODE OF SAFE PRACTICE
FOR CARGO STOWAGE AND SECURING**

- 1 Replace the first sentence of paragraph 1.9.1 of chapter 1 by:

"Prior to shipment the shipper should provide all necessary information about the cargo to enable the shipowner or ship operator to ensure that:".
- 2 Replace paragraph 2.9.1 of chapter 2 by:

"2.9.1 Where there is reason to suspect that a container or vehicle into which dangerous goods have been packed or loaded is not in compliance with the provisions of regulation VII/5.2 or 5.3 of SOLAS 1974, as amended, or with the provisions of section 12 or 17, as appropriate, of the General Introduction to the IMDG Code, or where a container packing certificate/vehicle packing declaration is not available, the unit should not be accepted for shipment."
- 3 Replace paragraph 3.2 of annex 6 by:

"3.2 The lashings can be of a conventional type using wire, steel band or any equivalent means."
- 4 Add a new annex 13, as shown in the appendix.

APPENDIX

Annex 13

Methods to assess the efficiency of securing arrangements for non-standardized cargo

1. SCOPE OF APPLICATION

The methods described in this annex should be applied to non-standardized cargoes, but not to containers on container ships.

Very heavy units as carried under the provisions of Chapter 1.8 of the Code of Safe Practice for Cargo Stowage and Securing (the Code) and those items for which exhaustive advice on stowage and securing is given in the annexes to the Code should be excluded.

Nothing in this annex should be read to exclude the use of computer software, provided the output achieves design parameters which meet the minimum safety factors applied in this annex.

The application of the methods described in this annex are supplementary to the principles of good seamanship and shall not replace experience in stowage and securing practice.

2. PURPOSE OF THE METHODS

The methods should:

- .1 provide guidance for the preparation of the Cargo Securing Manual and the examples therein;
- .2 assist ship's staff in assessing the securing of cargo units not covered by the Cargo Securing Manual;
- .3 assist qualified shore personnel in assessing the securing of cargo units not covered by the Cargo Securing Manual; and
- .4 serve as a reference for maritime and port related education and training.

3. PRESENTATION OF THE METHODS

The methods are presented in a universally applicable and flexible way. It is recommended that designers of Cargo Securing Manuals convert this presentation into a form suiting the particular ship, its securing equipment and the cargo carried. This form may consist of applicable diagrammes, tables or calculated examples.

4. STRENGTH OF SECURING EQUIPMENT

- .1 Manufacturers of securing equipment should at least supply information on the nominal breaking strength of the equipment in kilo-Newton (kN) ¹⁾.
- .2 "Maximum Securing Load" (MSL) is a term used to define the load capacity for a device used to secure cargo to a ship. Maximum securing load is to securing devices as safe working load is to lifting tackle.
The MSL for different securing devices are given below if not given under 4.3.
The MSL of timber should be taken as 0.3 kN per cm² normal to the grain.

Material	MSL
shackles, rings, deckeyes, turnbuckles of mild steel	50% of breaking strength
fibre rope	33% of breaking strength
wire rope (single use)	80% of breaking strength
wire rope (re-usable)	30% of breaking strength
steel band (single use)	70% of breaking strength
chains	50% of breaking strength

Table 1: Determination of MSL from breaking strength

¹⁾ 1 kN ≈ 100 kg

- .3 For particular securing devices (e.g. fibre straps with tensioners or special equipment for securing containers) a permissible working load may be prescribed and marked by authority. This should be taken as the MSL.
- .4 When the components of a lashing device are connected in series, for example, a wire to a shackle to a deck eyes, the minimum MSL in the series shall apply to that device.

5. SAFETY FACTOR

Within the assessment of a securing arrangement by a calculated balance of forces and moments the calculation strength of securing devices (CS) should be reduced against MSL using a safety factor of 1.5 as follows:

$$CS = \frac{MSL}{1.5}$$

The reasons for this reduction are the possibility of uneven distribution of forces among the devices, strength reduction due to poor assembly and others.

Notwithstanding the introduction of such a safety factor, care should be taken to use securing elements of similar material and length in order to provide a uniform elastic behavior within the arrangement.

6. RULE-OF-THUMB METHOD

- .1 The total of MSL values of the securing devices on each side of a unit of cargo (port as well as starboard) should equal the weight of the unit ²⁾.
- .2 This method, which implies a transverse acceleration of 1 g (9.81 m/sec²), applies to nearly any size of ships regardless of the location of stowage, stability and loading conditions, season and area of operation. The method however, neither takes into account the adverse effects of lashing angles and non-homogeneous distribution of forces among the securing devices nor the favourable effect of friction.
- .3 Transverse lashing angles to the deck should not be greater than 60° and it is important that adequate friction is provided by the use of suitable material. Additional lashings at angles of greater than 60° may be desirable to prevent tipping but are not to be counted in the number of lashings under the rule-of-thumb.

7. ADVANCED CALCULATION METHOD

7.1 Assumption of external forces

External forces to a cargo unit in longitudinal, transverse and vertical direction should be obtained using the formula:

$$F_{(x,y,z)} = m \cdot a_{(x,y,z)} + F_{w(x,y)} + F_{s(x,y)}$$

$F_{(x,y,z)}$ = longitudinal, transverse and vertical forces

m = mass of the unit

$a_{(x,y,z)}$ = longitudinal, transverse and vertical acceleration (see table 2)

$F_{w(x,y)}$ = longitudinal and transverse force by wind pressure

$F_{s(x,y)}$ = longitudinal and transverse force by sea sloshing.

The basic acceleration data are presented in Table 2.

²⁾ The weight of the unit should be taken in kN.

Transverse acceleration a_y in m/sec^2										Longitudinal acceleration a_x in m/sec^2
on deck high	7.1	6.9	6.8	6.7	6.7	6.8	6.9	7.1	7.4	3.8
on deck low	6.5	6.3	6.1	6.1	6.1	6.1	6.3	6.5	6.7	2.9
tween deck	5.9	5.6	5.5	5.4	5.4	5.5	5.6	5.9	6.2	2.0
lower hold	5.5	5.3	5.1	5.0	5.0	5.1	5.3	5.5	5.9	1.5
	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9 L
Vertical acceleration a_z in m/sec^2										
	7.6	6.2	5.0	4.3	4.3	5.0	6.2	7.6	9.2	

Table 2: Basic acceleration data

Remarks:

The given transverse acceleration figures include components of gravity, pitch and heave parallel to the deck. The given vertical acceleration figures do not include the static weight component.

The basic acceleration data are to be considered as valid under the following operational conditions:

1. Operation in unrestricted area.
2. Operation during the whole year.
3. Duration of the voyage is 25 days.
4. Length of the ship is 100 m.
5. Service speed is 15 knots.
6. $B/GM \geq 13$. (B: breadth of ship, GM: metacentric height)

For operation in a restricted area reduction of these figures may be considered taking also into account the season of the year and the duration of the voyage.

For ships of a length other than 100 m and a service speed other than 15 knots the acceleration figures should be corrected by a factor given in Table 3.

Length Speed	50	60	70	80	90	100	120	140	160	180	200
9 kn	1.20	1.09	1.00	0.92	0.85	0.79	0.70	0.63	0.57	0.53	0.49
12 kn	1.34	1.22	1.12	1.03	0.96	0.90	0.79	0.72	0.65	0.60	0.56
15 kn	1.49	1.36	1.24	1.15	1.07	1.00	0.89	0.80	0.73	0.68	0.63
18 kn	1.64	1.49	1.37	1.27	1.18	1.10	0.98	0.89	0.82	0.76	0.71
21 kn	1.78	1.62	1.49	1.38	1.29	1.21	1.08	0.98	0.90	0.83	0.78
24 kn	1.93	1.76	1.62	1.50	1.40	1.31	1.17	1.07	0.98	0.91	0.85

Table 3: Correction factors for length and speed

In addition for ships with B/GM less than 13, the transverse acceleration figures should be corrected by a factor given in Table 4.

B/GM	7	8	9	10	11	12	13 or above
on deck high	1.56	1.40	1.27	1.19	1.11	1.05	1.00
on deck low	1.42	1.30	1.21	1.14	1.09	1.04	1.00
tween deck	1.26	1.19	1.14	1.09	1.06	1.03	1.00
lower hold	1.15	1.12	1.09	1.06	1.04	1.02	1.00

Table 4: Correction factors for B/GM < 13

The following cautions should be observed:

In the case of marked roll resonance with amplitudes above $\pm 30^\circ$, the given figures of transverse acceleration may be exceeded. Effective measures should be taken to avoid this condition.

In case of heading the seas at high speed with marked slamming shocks, the given figures of longitudinal and vertical acceleration may be exceeded. An appropriate reduction of speed should be considered.

In the case of running before large stern or aft quartering seas with a stability, which does not amply exceed the accepted minimum requirements, large roll amplitudes must be expected with transverse accelerations greater than the figures given. An appropriate change of heading should be considered.

Forces by wind and sea to cargo units above the weather deck should be accounted for by a simple approach:

- force by wind pressure = 1 kN per m²
- force by sea sloshing = 1 kN per m².

Sloshing by sea can induce forces much greater than the figure given above. This figure should be considered as remaining unavoidable after adequate measures to prevent overcoming seas.

Sea sloshing forces need only be applied to a height of deck cargo up to 2 metres above the weather deck or hatch top.

For voyages in restricted area sea sloshing forces may be neglected.

7.2 Balance of forces and moments

The balance calculation should preferably be carried out for

- transverse sliding in port and starboard direction
- transverse tipping in port and starboard direction
- longitudinal sliding under conditions of reduced friction in foreward and aft direction.

In case of symmetrical securing arrangements one appropriate calculation is sufficient.

7.2.1 Transverse sliding

The balance calculation should meet the following condition (see also Fig. 1):

$$F_y \leq \mu \cdot m \cdot g + CS_1 \cdot f_1 + CS_2 \cdot f_2 + \dots + CS_n \cdot f_n$$

where

- n is the number of lashings being calculated
- F_y is transverse force from load assumption (kN)
- μ is friction coefficient
(μ = 0.3 for steel-timber or steel-rubber)
(μ = 0.1 for steel-steel dry)
(μ = 0.0 for steel-steel wet)

m is mass of cargo unit (t)
 g is gravity acceleration of earth = 9.81 (m/s²)
 CS is calculated strength of transverse securing devices (kN)
 f is function of μ and vertical securing angle α (see Table 5).

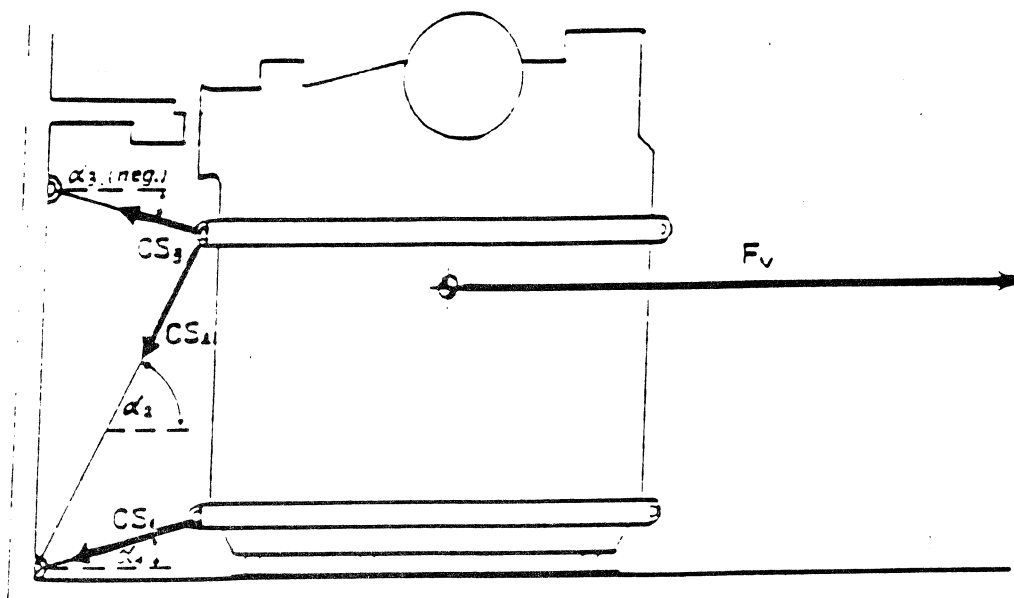


Figure 1: Balance of transverse forces

A vertical securing angle α greater than 60° will reduce the effectiveness of this particular securing device in respect to sliding of the unit. Disregarding of such devices from the balance of forces should be considered, unless the necessary load is gained by the imminent tendency to tipping or by a reliable pretensioning of the securing device which includes maintaining the pretension throughout the voyage.

Any horizontal securing angle, i.e. deviation from the transverse direction, should not exceed 30°, otherwise an exclusion of this securing device from the transverse sliding balance should be considered.

$\mu \backslash \alpha$	- 30°	- 20°	- 10°	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
0.3	0.72	0.84	0.93	1.00	1.04	1.04	1.02	0.96	0.87	0.76	0.62	0.47	0.30
0.1	0.82	0.91	0.97	1.00	1.00	0.97	0.92	0.83	0.72	0.59	0.44	0.27	0.10
0.0	0.87	0.94	0.98	1.00	0.98	0.94	0.87	0.77	0.64	0.50	0.34	0.17	0.00

Table 5: f-values as function of α and μ / Remark: $f = \mu \cdot \sin \alpha + \cos \alpha$

7.2.2 Transverse tipping

This balance calculation should meet the following condition (see also Fig. 2):

$$F_y \cdot a \leq b \cdot m \cdot g + CS_1 \cdot c_1 + CS_2 \cdot c_2 + \dots + CS_n \cdot c_n$$

where

F_y, m, g, CS, n are as explained under 7.2.1.

a is lever-arm of tipping (m) (see Fig. 2)

b is lever-arm of stability (m) (see Fig. 2)

c is lever-arm of securing force (m) (see Fig. 2)

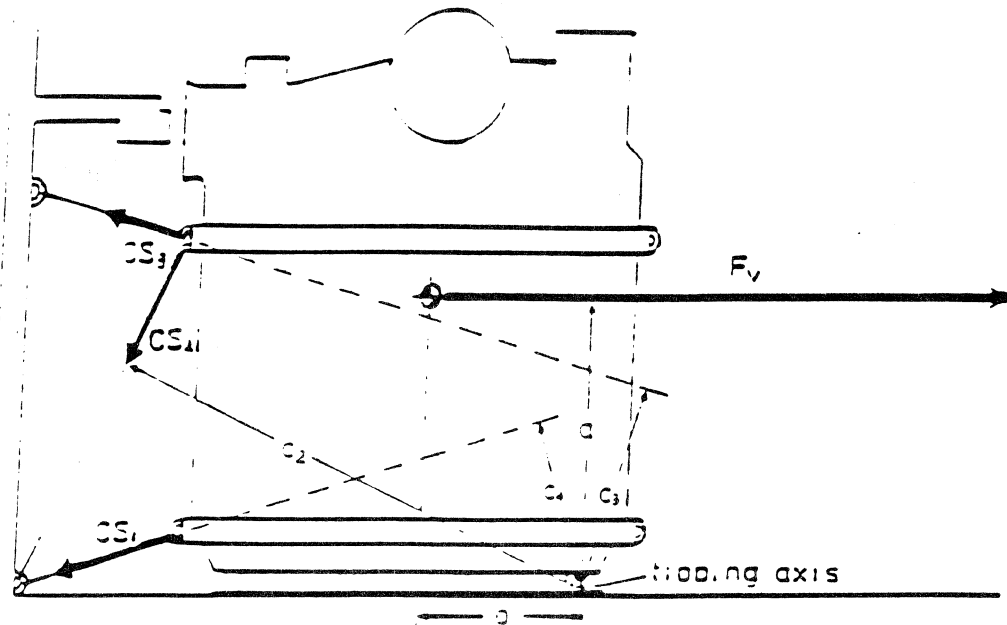


Figure 2: Balance of transverse moments

7.2.3 Longitudinal sliding

Under normal conditions the transverse securing devices provide sufficient longitudinal components to prevent longitudinal sliding. If in doubt, a balance calculation should meet the following condition:

$$F_x \leq \mu \cdot (m \cdot g - F_z) + CS_1 \cdot f_1 + CS_2 \cdot f_2 + \dots + CS_n \cdot f_n$$

where




F_x	is	longitudinal force from load assumption (kN)
n, μ, m, g	are	as explained under 7.2.1
F_z	is	vertical force from load assumption (kN)
CS	is	calculated strength of longitudinal securing devices (kN)

Remark: Longitudinal components of transverse securing devices should not be assumed greater than $0.5 \cdot CS$.

Advanced Calculation Method Calculated Example

Ship: L = 120 m: B = 20 m: GM = 1.4 m
Speed = 15 knots

Cargo: m = 62 t: dimensions = 6·4·4 m
Stowage at 0.7 L on deck low

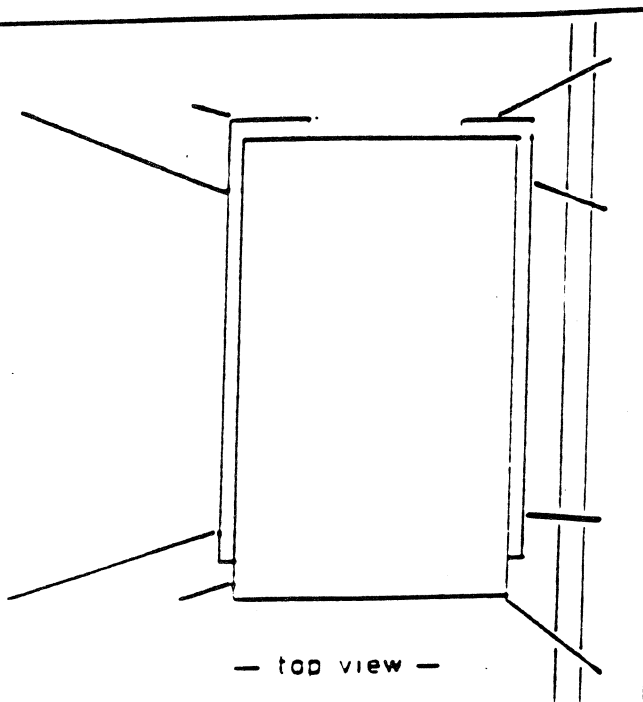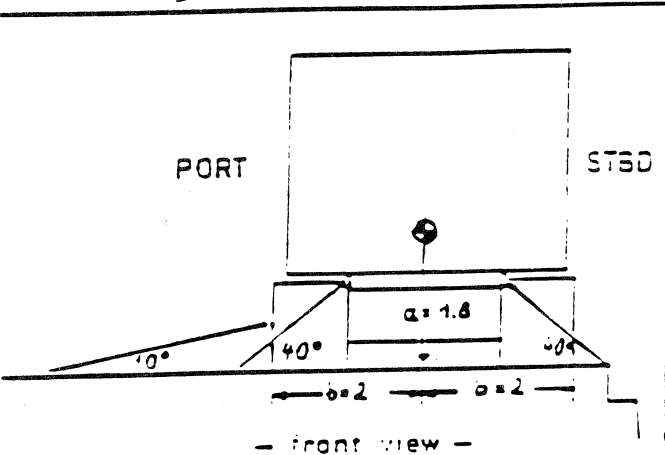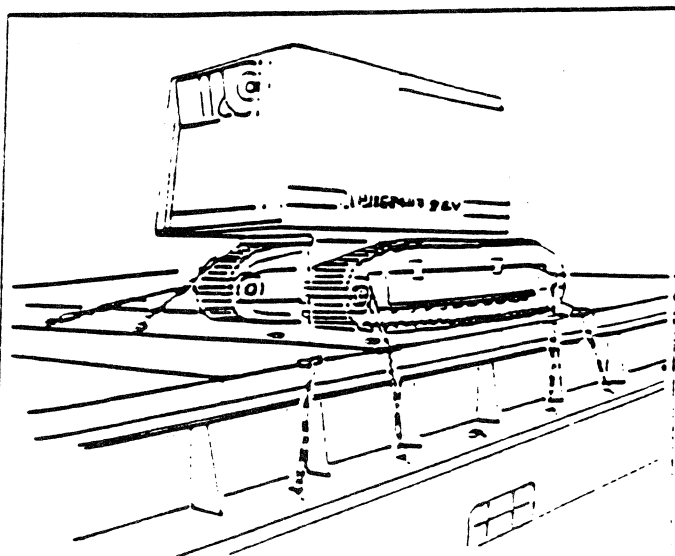

Securing material:

wire rope: br. strength = 125 kN; MSL = 100 kN
shackles, turnbuckles, deck rings: ... br. strength = 180 kN; MSL = 90 kN
stowed on dunnage-noarust: $\mu = 0.3$: CS = $90/1.5 = 60$ kN

Securing arrangement:

side	n	CS	α	r	c
STBD	4	60 kN	40°	0.96	-
PORT	2	60 kN	40°	0.96	-
PORT	2	60 kN	10°	1.04	-

External forces:

$$F_x = 2.9 \cdot 0.89 \cdot 62 + 16 + 8 = 184 \text{ kN}$$

$$F_y = 6.3 \cdot 0.89 \cdot 62 + 24 + 12 = 384 \text{ kN}$$

$$F_z = 6.2 \cdot 0.89 \cdot 62 = 342 \text{ kN}$$

Balance of forces (STBD-arrangement):

$$384 < 0.3 \cdot 62 \cdot 9.81 + 4 \cdot 60 \cdot 0.96$$

$$384 < 412 \quad \text{this is ok!}$$

Balance of forces (PORT-arrangement):

$$384 < 0.3 \cdot 62 \cdot 9.81 + 2 \cdot 60 \cdot 0.96 + 2 \cdot 60 \cdot 1.04$$

$$384 < 422 \quad \text{this is ok!}$$

Balance of moments:

$$384 \cdot 1.8 < 2 \cdot 62 \cdot 9.81$$

$$691 < 1216 \quad \text{no tipping, even without lashings!}$$

Explanations and interpretation to the "Methods to assess the efficiency of securing arrangements for non-standardized cargo"

1. The exclusion from the scope of application of the methods of very heavy units as carried under the provisions of Chapter 1.8 of the Code should be understood to accommodate the possibility of adapting the stowage and securing of such units to specifically determined weather- and sea-conditions during transport. The exclusion should not be understood as restriction of the methods to units up to a certain mass or dimension.

2. The acceleration figures given in Table 2 in combination with the correction factors represent peak values on a 25-day voyage. This does not imply that peak values in x-, y- and z-direction occur simultaneously with the same probability. It can be generally assumed that peak values in the transverse direction will appear in combination with less than 60% of the peak values in longitudinal and vertical direction.

Peak values in longitudinal and vertical direction may join more closely because they have the common source of pitching and heaving.

3. The advanced calculation method uses the "worst case approach". That is expressed clearly by the transverse acceleration figures which increase to forward and aft in the ship and thereby show the influence of transverse components of simultaneous vertical accelerations. Consequently there is no need to consider vertical accelerations separately in the transverse balances of forces and moments. These simultaneously acting vertical accelerations create an apparent increase of weight of the unit and thus improve the friction in the balance of forces, respectively the moment of stableness in the balance of moments. For this reason there is no reduction of the normal force $m \cdot g$ due to the present angle of heel.

The situation is different for the longitudinal sliding balance. The worst case would be a peak value of the longitudinal force F_x accompanied by an extreme reduction of weight through the vertical force F_z .

4. The friction coefficients shown in the methods are somewhat reduced against appropriate figures in other publications. The reason for this should be seen in various influences which may appear in practical shipping as: moisture, grease, oil, dust and other residues, vibration of the ship.

There are certain stowage materials available which are said to increase friction considerably. Extended experience with these materials may bring additional coefficients into practical use.

5. The principal way of calculating forces within the securing elements of a complex securing arrangement should necessarily include the consideration of
 - load-elongation behaviour (elasticity),
 - geometrical arrangement (angles, length),
 - pretension

of each individual securing element.

This approach would require a large volume of information and a complex, iterative calculation. Still the results would be doubtful due to uncertain parameters.

Therefore the simplified approach was chosen with the assumption that the elements take an even load of CS (calculation strength) which is reduced against the MSL (maximum securing load) by the safety factor 1.5.

6. When employing the advanced calculation method the way of collecting data should be followed as shown in the calculated example. It is acceptable to estimate securing angles, to take average angles for a set of lashings and similarly arrive at reasonable figures of the levers a, b and c for the balance of moments.

It should be born in mind that meeting or missing the balance calculation just by a tiny change of one or the other parameter indicates to be near the goal anyway. There is no clear-cut border line between safety and non-safety. It in doubt, the arrangement should be improved.

